




## SPECIFICATIONS

PARAMETER		SPECIFICATION
Center Wavelength (nm)		1310 / $\lambda_1 \sim \lambda_{10}$
Passband (nm) 1310 $\pm$ 40 & ITU $\pm$ 6.5		1310 $\pm$ 40 & ITU $\pm$ 6.5
Operating Wavelength (nm)		1260~1620
Channel Space (nm)		20
IL (dB)	CWDM Channel	<2.2
	1310nm Channel	$\leq$ 1.8
Isolation (dB)	Adjacent Channel	>35
	Non-Adjacent Channel	$\geq$ 45
	1310nm Channel	$\geq$ 45
Directivity (dB)		>50
Ripple (dB)		<0.5
PDL (dB)		<0.2
PMD (ps)		<0.1
RL (dB)		>45
Maximum Optical Power (mw)		<300
Operating Temperature ( $^{\circ}$ C)		-40~85
Storage Temperature ( $^{\circ}$ C)		-40~85
Package (mm)		(50 X 50 X 6)
Connectors		LC/APC, LC/UPC

Note: specified with connectors  
 Specifications subject to change without prior notice  
 Copyright © 2017 Lindsay Broadband Inc.

## MECHANICAL DIMENSIONS

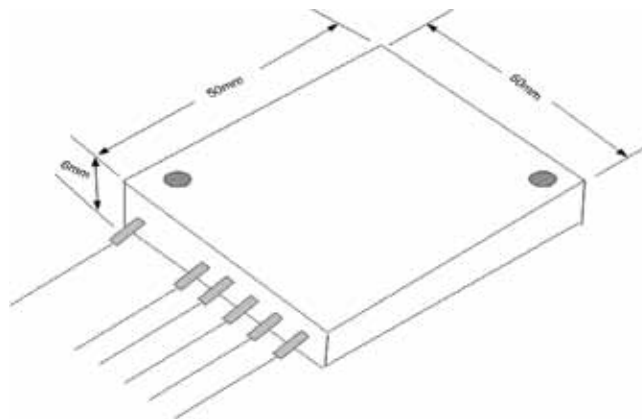

FOR MORE INFORMATION ON OUR WIRELESS, OPTICAL AND RF PRODUCTS  
 CALL - 18-800-465-7046 OR  
 U.S. Sales Toll Free: 877-672-4340  
[www.lindsaybroadbandinc.com](http://www.lindsaybroadbandinc.com)